ELECTRICAL STRIKE

»Non-handed fully reversible
»Field reversible fail-safe or fail-secure
»Static strength 1,000 lbs (454Kg)
»Dynamic strength 50 ft-lbs
»Endurance rating 250,000 cycles UL tested, 1,000,000 cycles factory tested
»Trim plate included
»Brushed stainless steel (US32D) finish
»UL1034 burglary-resistant listed:BP10269
»CE: EC741012-01

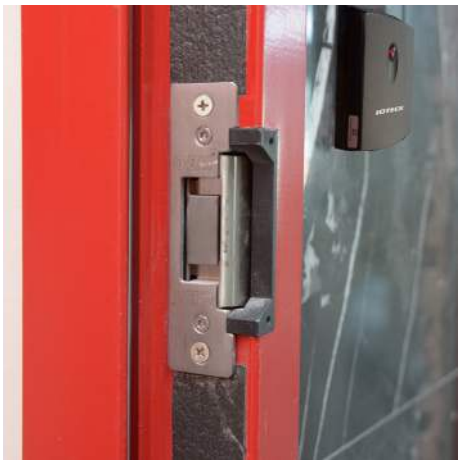

Voltage (VDC)	Latch Throw	Frame	Mount	Body Construction
12, 24, or dual 12/24	9/16" (15mm)	Hollow Metal	Mortise	Zinc Alloy Stainless Steel
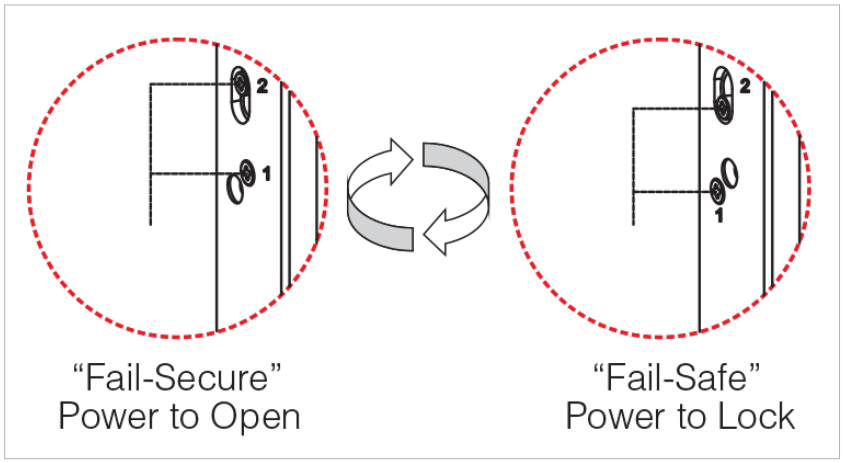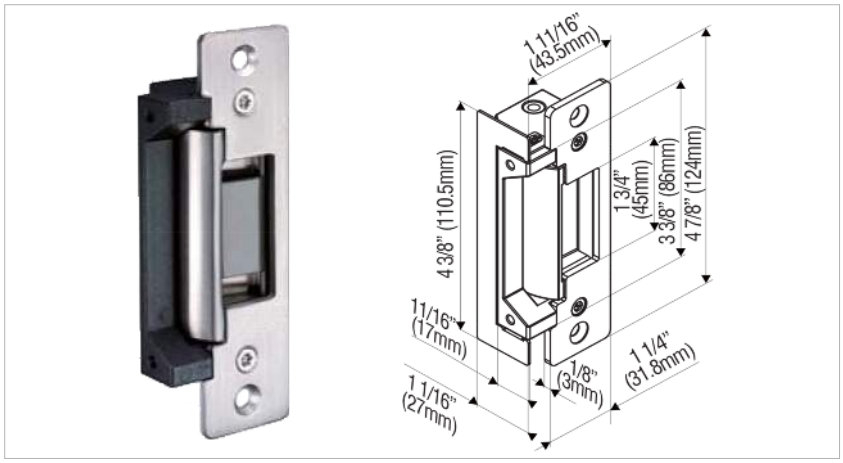
Fail-safe or Fail-secure is field reversible by changing the position of screws.