


OPTIONAL ACCESSORIES




- » Weather seal slots are present on the door frame. Depending on the customer demands, air and sound insulating seals are also provided.
- » Coordinator can be installed to the double winged doors in order for the door leaves to close in coordination.
- » Supporting plates are present inside the door leaves for installation of door closer.
- » For doors which will be used with an access control unit, top quality electrical strike (tested for 1 million cycles) can be applied during production as an optional accessory.
- » Windows are possible. Stock sizes are 500 x 500 mm and 300x400 mm.
- » Aluminium or fire-rated louvers may be applied on request.

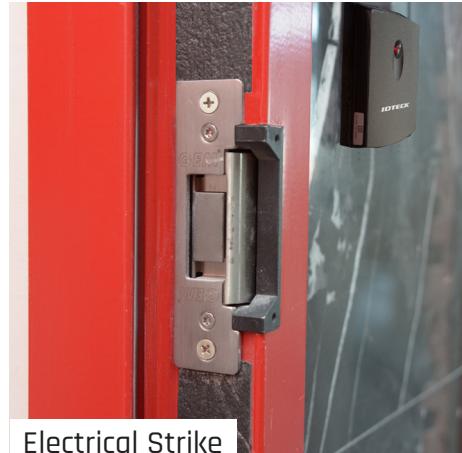

Electrical Strike




Windows

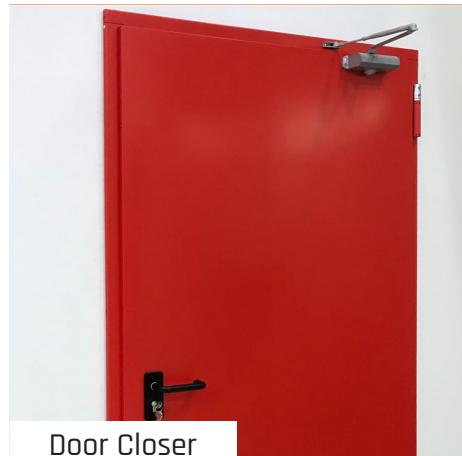

Door Closer



Louvers

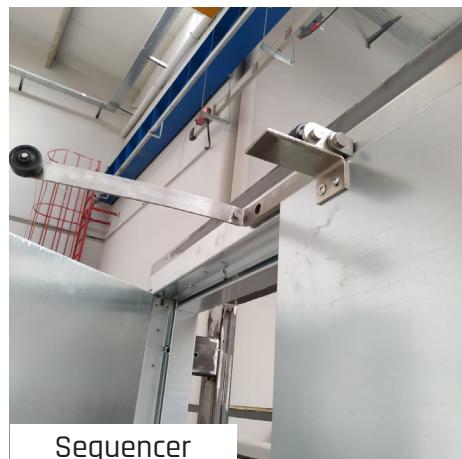

Sequencer